

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 300 123 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**09.04.2003 Bulletin 2003/15**

(51) Int Cl.7: **A61F 13/15**

(21) Application number: **01123651.0**

(22) Date of filing: **02.10.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- **Petersen, John**  
**41516 Grevenbroich (DE)**
- **Kourtidis, Konstantinos**  
**40599 Düsseldorf (DE)**
- **Selen, Peter**  
**5993 PG Maasbree (NL)**

(71) Applicant: **3M Innovative Properties Company**  
**St. Paul, Minnesota 55133-3427 (US)**

(74) Representative: **Wilhelm, Stefan M. et al**  
**Office of Intellectual Property Counsel,**  
**c/o 3M Deutschland GmbH,**  
**Carl-Schurz-Strasse 1**  
**41453 Neuss (DE)**

(72) Inventors:  
• **Guenther, Werner**  
**41462 Neuss (DE)**

(54) **Method of applying a fastener portion to a diaper**


(57) The present invention relates to a method of applying a fastener portion (10) to an absorbent article (1) and, in particular, to a disposable diaper, said absorbent article (1) comprising a top sheet web (2) having an inner surface (2a), an outer surface (2b), a first lateral edge (2c) and a second lateral edge (2d), a back sheet (3) having an inner surface (3a), an outer surface (3b), a first lateral edge (3c) and a second lateral edge (3d), an absorbent core (4) arranged between said top sheet (2) and said back sheet (3), said fastener portion (10) comprising a manufacturer's end (11) for securing said fastener portion (10) to the absorbent article (1) and a user's end (12) comprising a fastener means (15), said method comprising in a first alternative (A) the steps of

(i) providing a top sheet (2),

(ii) placing one or more fastener portions (10) onto the inner surface (2a) of the top sheet (2) so that the user's end (12) is essentially supported by the top sheet (2) and the manufacturer's end (11) is essentially adjacent to one of the lateral edges (2c, 2d) of the top sheet (2) whereby the fastening means (15) is facing towards the inner surface (2a) of the top sheet (2),

(iii) folding around the manufacturer's end (11) so that it is essentially opposite to the user's end (12), and

(iv) applying an absorbent core (4) and a back sheet (3) onto the top sheet (2), whereby the sequence of steps (iii) and (iv) may be exchanged.

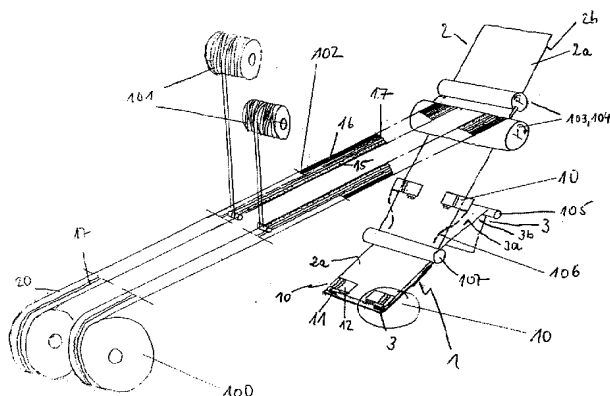

## Description

### Field of the invention

**[0001]** The present invention relates to a method of applying a fastener portion to an absorbent article, and, in particular, to a disposable diaper comprising a back sheet facing outwards, an absorbent core and a top sheet contacting the wearer's skin when the absorbent article is applied to the wearer.

### Background of the invention

**[0002]** Absorbent articles such as disposable diapers are provided with fastener portions which are adhered to the body of the absorbent article through one of its end portions, the so-called manufacturer's end, by means of, for example, an adhesive layer. The opposite end portion of the fastener portion which is usually referred to as user's end, comprises a fastening means such as an adhesive fastening means or a mechanical fastening means to close the absorbent article around the wearer's body and fasten the absorbent article on the body. Fig. 1a and b show a disposable diaper of the state of the art having an hour-glass shape in an open (Fig. 1a) and in a closed form (Fig. 1b), respectively. It can be seen from Fig. 1b that the diaper comprises an absorbent core 4 between a back sheet 3 and a top sheet 2. The manufacturer's end 11 of the fastener portion 10 is adhered to the side panel 6 of the diaper and the user's end 12 is fastened to the landing zone 5 on the front waistband portion 7b on the back sheet 3 of the diaper.

**[0003]** EP 0,379,850 discloses a method for manufacturing fastener portions having rounded grip-ends or fingerlifts in order to avoid that the wearer of the diaper is hurt or even cut by sharp-edged fingerlifts. A pair of fastener portions is die-cut continuously from a web of fastener portions, and the fastener portions obtained are applied continuously to the edge portions of two different diapers conveyed side-by-side on a conveyor belt. Other methods for forming a plurality of fastener portions, which can be integrated into continuous manufacturing lines for diapers, are disclosed, for example, in WO 98/03,140, US 5,399,219 and US 5,876,531.

**[0004]** WO 84/04,242 discloses another diaper shape wherein the side panels 6 of the diaper are not integrated into the body portion of the diaper so that such body portion is essentially rectangular. A similar construction is shown, for example, in US 5,527,302. In these constructions, the dimensions of the fastener portions 10 are typically larger than the dimensions of fastener portions used in conjunction with diapers comprising side panels 6 integrated into the body portion of the diaper like those shown in Fig. 1a and b. The larger dimension of the fastener portions 10 is required in order to provide a reliable and stress-free fit of the diaper comprising no integrated side panels 6, on the wearer. Strip-type fas-

tener portions used in conjunction with integrated side panels 6 like those shown by referral number 10 in Fig. 1a and b, are often referred to as fastener tapes whereas fastener portions like those disclosed in US 5,527,302 are often referred to as big ear fastener portions.

**[0005]** Fastener portions often comprise in addition to the fastening means an elastic means in order to impart stretchability to the fastener portions. Stretchable fastener portions are disclosed, for example, in US 5,527,302 and in WO 99/03,347.

**[0006]** While fastener portions comprising an elastic means are generally advantageous and tend to improve the fit of the diaper to the wearer, they may exhibit a reduced stiffness in comparison to fastener portions comprising no elastic means. This may adversely affect the handleability of fastener portions comprising an elastic means and render the attachment of such fastener portions to the body portion of a diaper difficult, in particular, under high speed manufacturing operations.

**[0007]** It has also been difficult in prior art to provide a method for applying a fastener portion to a diaper so that the fastener portion is easy to open and is also resistant to undesired, premature opening. EP 0,321,232 discloses, for example, a fastener portion comprising both an adhesive and a mechanical fastening means. The fastener portion is attached to the diaper through its manufacturer's end and then folded over onto the inner surface of the top sheet of the diaper where the adhesive means adheres to the inner surface of the top sheet thereby preventing premature "pop open" ("flagging") of the fastener portion while the absorbent article is still being processed on the diaper line, for example. Flagging of fastener portions may result in disrupting fastener portions in subsequent processing steps and/or adversely affect the folding of the diaper into a packable state.

**[0008]** It was therefore an object of the present invention to provide an improved method of applying a fastener portion to absorbent articles which can be effectively applied under high speed manufacturing conditions and/or which does not exhibit the shortcomings of the prior art or exhibit them to a lower degree only.

**[0009]** It was another object of the present invention to provide a fastener portion which when applied to an absorbent article, does not "pop open" prematurely.

**[0010]** Other object of the present invention can be taken from the following detailed description of the invention.

### Brief description of the invention

**[0011]** The present invention refers to a method of applying a fastener portion 10 to an absorbent article 1 and, in particular, to a disposable diaper, said absorbent article 1 comprising a top sheet web 2 having an inner surface 2a, an outer surface 2b, a first lateral edge 2c and a second lateral edge 2d, a back sheet 3 having an

inner surface 3a, an outer surface 3b, a first lateral edge 3c and a second lateral edge 3d, an absorbent core 4 arranged between said top sheet 2 and said back sheet 3, said fastener portion 10 comprising a manufacturer's end 11 for securing said fastener portion 10 to the absorbent article 1 and a user's end 12 comprising a fastener means 15, said method comprising in a first alternative (A) the steps of

- (i) providing a top sheet 2,
- (ii) placing one or more fastener portions 10 onto the inner surface 2a of the top sheet 2 so that the user's end 12 is essentially supported by the top sheet 2 and the manufacturer's end 11 is essentially adjacent to one of the lateral edges 2c, 2d of the top sheet 2 whereby the fastening means 15 is facing towards the inner surface 2a of the top sheet 2,
- (iii) folding around the manufacturer's end 11 so that it is essentially opposite to the user's end 12, and
- (iv) applying an absorbent core 4 and a back sheet 3 onto the top sheet 2,

whereby the sequence of steps (iii) and (iv) may be exchanged, or in a second alternative (B)

- (i) providing a back sheet 3,
- (ii) placing one or more fastener portions 10 onto the outer surface 3b of the back sheet 3 so that the user's end 12 is essentially supported by the back sheet 3 and the manufacturer's end 11 is essentially adjacent to one of the lateral edges 3c, 3d of the back sheet 3 whereby the fastening means 15 is facing away from the outer surface 3b of the back sheet 3,
- (iii) folding over the manufacturer's end 11 so that it is essentially opposite to the user's end 12, and
- (iv) applying an absorbent core and a top sheet 2 onto the back sheet 3,

whereby the sequence of steps (iii) and (iv) may be exchanged.

**[0012]** The present invention also refers to a method of applying one or more twin fastener portions 10a to an absorbent article 1 and, in particular, to a disposable diaper, said absorbent article 1 comprising a top sheet web 2 having an inner surface 2a, an outer surface 2b, a first lateral edge 2c and a second lateral edge 2d, a back sheet 3 having an inner surface 3a, an outer surface 3b, a first lateral edge 3c and a second lateral edge 3d, an absorbent core 4 arranged between said top sheet 2 and said back sheet 3, said twin fastener portion 10a comprising a first manufacturer's end 11a, a first user's end 12a, a releasable connection 19, a second user's end 12b and a second manufacturer's end 11b, wherein the dimensions of the manufacturer's ends 11a, 11b, the user's ends 12a, 12b and the releasable connection 19 in cross-direction being selected so that the manufacturer's ends 11a, 11b can be positioned adjacent to oppo-

site edges 2c, 2d and/or 3c, 3d of the top sheet 2 or the back sheet 3, respectively, and wherein the releasable connection 19 can be released to provide two separate fastener portions 10, said method comprising in a first alternative (A) the steps of

- (i) providing a top sheet 2,
- (ii) placing the one or more twin fastener portions 10a onto the inner surface 2a of the top sheet 2 so that the user's ends 12a, 12b and the releasable connection 19 are essentially supported by the top sheet 2 and the manufacturer's ends 11a, 11b are essentially adjacent to opposite edges 2c, 2d of the top sheet 2 whereby the fastening means 15a, 15b are facing towards the inner surface 2a of the top sheet 2,
- (iii) folding around the manufacturer's ends 11a, 11b, and
- (iv) applying an absorbent core 4 and a back sheet 3 onto the top sheet 2,

whereby the sequence of steps (ii) and (iii) or (iii) and (iv), respectively, may be exchanged, or in a second alternative (B)

- (i) providing a back sheet 3,
- (ii) placing the one or more twin fastener portions 10a onto the outer surface 3b of the back sheet 3 so that the user's ends 12a, 12b and the releasable connection 19 are essentially supported by the back sheet 3 and the manufacturer's ends 11a, 11b are essentially adjacent to opposite edges 3c, 3d of the back sheet 3 whereby the fastening means 15 are facing outwards,
- (iii) folding around the manufacturer's ends 11a, 11b, and
- (iv) applying an absorbent core 4 and a top sheet 2 onto the back sheet 3,

whereby the sequence of steps (ii) and (iii) or (iii) and (iv), respectively, may be exchanged.

**[0013]** The present invention also relates to a twin fastener portion 10a comprising in the sequence given in cross-direction a first manufacturer's end 11a, a first user's end 12a, a releasable connection 19, a second user's end 12b and a second manufacturer's end 11b, wherein the user's ends 12a and 12b are directly connected to each other by the releasable connection 19 without any separate part and wherein the releasable connection 19 can be released to provide two separate fastener portions 10.

#### Brief description of the figures

**[0014]** *Fig. 1a* is a schematic representation of a disposable diaper having an hour-glass shape in an open state, said diaper comprising a rear waistband portion 7a and a front waistband portion 7b which are connected

by an intermediate portion comprising the crotch region 8, whereby said waistband portions 7a, 7b comprise side panels 6. The diaper furthermore comprises fastener portions 10 which are secured through their manufacturer's ends 11 to the side panels 6, while the user's ends 12 are manipulated by the user and secured to the landing zone 5 when applying the diaper to the wearer.

**[0015]** Fig. 1b is a schematic representation of the disposable diaper of Fig. 1a in a closed form, said diaper comprising an absorbent core 4 between a back sheet 3 and a top sheet 2, and a fastener portions 10 being adhered to the side panels 6 of the diaper through their manufacturer's ends 11 and fastened through their user's end 12 to the landing zone 5 on the front waistband portion 7b on the exposed outer surface 3b of the back sheet 3.

**[0016]** Fig. 2 is a schematic representation of an embodiment of the method of the present invention which is operated continuously and which comprises providing a continuous web of top sheet 2 having an inner surface 2a and an outer surface 2b, placing a pair of two fastener portions 10 in intervals in machine direction MD onto the inner surface 2a of the top sheet 2, folding around the manufacturer's end along the lateral edge 2c of the top sheet 2 and applying a continuous back sheet 3 through its inner surface 3a onto the outer surface 2b of the top sheet 2 to provide a continuous web of an absorbent article 1 which can be cut into separate absorbent articles 1. Fig. 2 also schematically shows the semi-continuous preparation of pairs of two separate fastener portions 10 comprising applying fastener means 15 from supply rolls 101 and adhesive layers 16 from adhesive coating unit 102 (not shown in Fig. 2) to a continuous web of the backing 20 supplied by rolls 100, and cutting two pairs of fastener portions intermittently with the cut and place applicator 103, 104 comprising a vacuum roll 103 and a rotating knife 104.

**[0017]** Fig. 3 is a schematic representation of a cross-sectional view of an absorbent article 1 in its cross direction (CD) through fastener portion 10 and gives an enlarged view of the circled portion of the absorbent article marked in Fig. 2. The absorbent article 1 comprises a top sheet 2, a back sheet 3, an absorbent core 4 and the fastener portion 10 whereby the manufacturer's end 11 of said fastener portion 10 is arranged between the outer surface 2b of the top sheet 2 and the inner surface 3a of the back sheet 3, and whereby the grip portion 12' of the user's end 12 of said fastener portion 10 is arranged on the inner surface 2a of said top sheet 2 and comprises mechanical fastening means 15.

**[0018]** Fig. 4 is a schematic representation of another embodiment of the method of the present invention which is operated continuously and differs from the method of Fig. 2 in that one twin fastener portion 10a is used instead of the pair of two separate fastener portions 10, said twin fastener portion 10a comprising a releasable connection 19.

**[0019]** Fig. 5a and Fig. 5b each are schematic repre-

sentations of alternatives for arranging the two manufacturer's ends 11a of twin fastener portions 10a between the top sheet 2 and the back sheet 3, respectively, of the absorbent article whereby the circled portion is enlarged to give a detailed, cross-sectional view in the cross direction (CD) of the absorbent article through fastener portion 10a to show its anchoring to the absorbent article; the graphical representation of the twin fastener portion 10a only extends to the fastener element 15, the releasable connection 19 is not shown.

**[0020]** Fig. 6 is a schematic representation of another method according to the present invention comprising providing a top sheet web 2 having an inner surface 2a, an outer surface 2b and a fold 2e, applying a twin fastener portion 10a and folding over its two manufacturer's ends 11a, 11b and adhering them to the inner surface 2a of the top sheet 2, breaking the releasable connection 19 of the twin fastener portion 10a by exerting a force in cross-direction to the top sheet 2 thereby unfolding fold 2e and applying back sheet 3.

#### Detailed description of the invention

**[0021]** As used above and below, the term "absorbent article" refers to articles which are placed against or in proximity to the body of the wearer to absorb and contain the various exudates discharged from the body. The absorbent article preferably is disposable, i. e. it is intended to be disposed of after single use and not intended to be laundered or otherwise restored or reused.

**[0022]** A preferred embodiment of the absorbent article referred to in the present invention, is a diaper. The term "diaper" as used above and below refers to a garment generally worn by infants or incontinent persons that is drawn up between the legs and fastened about the waist of the wearer.

**[0023]** As used above and below, the term machine direction (MD) of the absorbent article 1 denotes the direction of the running, continuous web of, for example, the top sheet 2 and the back sheet 3 during the manufacturing of the diaper (see, e. g., Fig. 2) and thus corresponds to the longitudinal direction of the diaper which is normal to the waistband portions 7a, 7b. The cross-direction (CD) is normal to the machine direction. Likewise, the cross-direction (CD) of the fastener portion 10 corresponds to its longitudinal direction, i.e. is the direction pointing from the manufacturer's end 11 to the user's end (compare, e.g., the direction of the running web of the fastener portion in the left part of Fig. 2); the machine direction of the fastener portion is normal to its cross-direction.

**[0024]** The term "adjacent" as used above and below is understood to denote that the manufacturer's end 11 is arranged in proximity of one of the lateral edges of the top sheet 2 or back sheet 3, respectively, whereby a variety of positions is possible. The manufacturer's end may, for example, essentially project over the corresponding lateral edge. It is also possible, however, that

the outboard edge of the manufacturer's end in cross-direction essential matches with said lateral edge of the top sheet 2 or back sheet 3, respectively, so that the manufacturer's end 11 is - prior to the step of folding over - essentially supported by the top sheet 2 and/or back sheet 3.

**[0025]** The top sheet 2 comprises an inner surface 2a contacting the wearer's skin and an outer surface 2b facing towards the absorbent core 4. The edges 2c, 2d of the top sheet are formed by the lateral edges of the top sheet in machine direction. Likewise, the back sheet 3 comprises an inner surface 3a facing towards the absorbent core 4, and an outer, exposed surface 3b. The edges 3c, 3d of the back sheet 3 are formed by the lateral edges of the top sheet in machine direction.

**[0026]** Absorbent articles 1 and, in particular, diapers, may have any desired shape such as, for example, a rectangular shape, an I shape, a T shape or an essentially hourglass shape.

**[0027]** Fig. 1b is a partially cut-away perspective representation of an essentially hourglass-shaped diaper in a closed form. The diaper comprises an absorbent core 4 between a top sheet 2 and a back sheet 3. The fastener portions 10 are secured through their manufacturer's ends 11 to the outer surface 3b of the rear waist-band portion 7a and/or the side panel 6 of back sheet 3. In the closed state of the diaper shown in Fig. 1b, the fastener portions 10 are attached through their user's ends 12 to the target portion 5 on the front waist-band portion 7b of the diaper.

**[0028]** In the various constructions of absorbent articles 1 and diapers, the back sheet 3 generally provides an outer cover member of the absorbent article 1 although sometimes, the absorbent article may comprise a separate outer cover member which is different from the back sheet 3.

**[0029]** The back sheet 3 which has an inner surface 3a and an outer surface 3b facing outwards, i. e. away from the wearer, may comprise a liquid permeable material but preferably comprises a material which is substantially impermeable to liquids. The material of the back sheet 3 is preferably selected so that it prevents exudates contained in the absorbent core 4 from wetting articles such as bed-sheets and overgarments contacting absorbent article 1. For example, thin plastic films such as polypropylene or polyethylene films or other thin films of flexible, liquid-impermeable materials can be preferably used as back sheet 3 of absorbent article 1. Alternative constructions of the back sheet 3 comprise a woven or non-woven fibrous layer which has been totally or partially constructed or treated to impart the desired levels of liquid impermeability to those regions which are adjacent or proximate to the absorbent core 4 in order to prevent the exudates from escaping from the absorbent core. In another embodiment, the back sheet 3 may comprise a microporous, breathable material which permits gases such as water vapour to escape from the absorbent core 4 while effectively preventing

liquid exudates from wetting through back sheet 3.

**[0030]** The size and shape of back sheet 3 is typically selected in view of the particular design of the absorbent article, the size and shape of the absorbent core 4 and/or the size and shape of the top sheet 2. The size and shape of the back sheet 3 essentially completely covers the absorbent core 4. If desired, the back sheet 3 may extend, however, beyond the terminal edges of absorbent core 4 and/or top sheet 2 by a selected distance.

**[0031]** The top sheet 2 is preferably selected so that its inner surface 2a is compliant, soft-feeling and non-irritating to the wearer's skin. Top sheet 2 is further selected so that it is liquid pervious permitting liquids to readily penetrate through its thickness. A suitable top sheet 2 may be manufactured from a wide range of materials such as porous foams, reticulated foams, apertured films, natural fibers (e. g., wood or cotton fibers), synthetic fibers (e. g., polyester or polypropylene fibers) or from a combination of natural and synthetic fibers. Preferably, the top sheet 2 comprises a hydrophobic material to isolate the wearer's skin from liquids retained in the absorbent core 4.

**[0032]** Various woven and non-woven fabrics can be used for top sheet 2. For example, the top sheet may comprise melt-blown, spin-bonded or carded polyolefin non-wovens which may preferably have an area weight of between 10 - 30 g/m<sup>2</sup>.

**[0033]** The size and shape of the top sheet 2 is typically selected in view of the particular design of the absorbent article 1, the size and shape of the absorbent core 4, the size and shape of the back sheet 3 and the size and shape of the area coming into contact with the wearer's skin. The size and shape of the top sheet 2 may essentially match those of the back sheet 3 but it is also possible that the size and/or shape of the back sheet 3 and the top sheet 2 deviate from each other. In a preferred embodiment, the size and shape of both the back sheet 3 and the top sheet 2 essentially match at least in the area where the fastener portion 10 is applied to the absorbent article whereas the back sheet 3 may extend beyond the top sheet 2 in other areas of the absorbent article 1, or vice versa.

**[0034]** Top sheet 2 and back sheet 3 are connected or otherwise associated together in any operable manner. Top sheet 2 can be affixed directly to back sheet 3 but it is also possible that back sheet 3 and top sheet 2 are connected or joined indirectly with each other by affixing top sheet 2 to intermediate member(s) which in turn are affixed to back sheet 3. Top sheet 2 and back sheet 3 can be connected or affixed directly to each other in the periphery of the absorbent article 1 by, for example, adhesive bonds, sonic bonds, thermal bonds or any other attachment means.

**[0035]** The absorbent core 4 is arranged between the back sheet 3 and the top sheet 2 and has a construction which is generally compressible, conformable, non-irritating to the wearer's skin, and capable of absorbing and retaining liquid body exudates. The absorbent core 4

may comprise, for example, hydrophilic fibrous material and high-absorbing materials and can be provided, for example, in the form of an absorbent pad. The absorbent core 4 may comprise a single, integral piece of material, or alternatively, may comprise a plurality of individual separate pieces of material which are operably assembled together.

**[0036]** The sections on opposed ends of the absorbent article 1 in machine direction which when the absorbent article is applied to the wearer, span around the wearer's waist, are usually referred to as waistband portions 7a, 7b. The absorbent article 1 comprises two waistband portions at its opposed ends in machine direction which form, for example, the front waistband portion 7b and the rear waistband portion 7a, and an intermediate section connecting said two waistband portions. The absorbent article 1 may furthermore comprise side panels 6 which extend in cross-direction from the opposed lateral ends of at least one waistband portion of the back sheet 3 and/or the top sheet 2. The size and the shape of the side panels and their attachment to the back sheet 3 and/or the top sheet 2 can vary broadly. The side panels may form, for example, an integral part of the back sheet 3 and/or the top sheet 2. In alternative configurations, the side panels may be separate members that are connected to back sheet 3 and/or top sheet 2. Side panels may be present at each of the two opposed waistband portions.

**[0037]** The fastener portion 10 allows to releasably and refastenably attach the absorbent article 1 around the wearer's body. The fastener portion 10 comprises a manufacturer's end 11 for securing it to the absorbent article 1 and a user's end 12 comprising a fastener means 15, said user's end being gripped by the user when attaching the absorbent article 1 to the wearer. The manufacturer's end corresponds to the part of the fastener portion which is fixed or secured to the absorbent article during the manufacture of the absorbent article; it usually extends from one of the lateral edges (i. e. the edges in cross-direction) of the fastener portions to a position in cross-direction where the area of anchoring of the fastener portions to the diaper as provided during manufacture, ends. The user's end 12 corresponds to the part of the fastener portion 10 which is not anchored to the absorbent article during manufacture; it usually corresponds to the part of the fastener portion which is different from the manufacturer's end 11. This means in other words that the sum of the extensions of the manufacturer's end 11 and the user's end in cross-direction correspond to the extension of the fastener portion 10 in cross-direction. The extension of the user's end 12 in cross-direction preferably is from 55-80% of the extension of the fastener portion 10 in cross-direction whereas the extension of the manufacturer's end 11 correspondingly preferably varies between 45 and 20%. The size and shape of the fastener portion 10 may vary widely depending on the size, shape and construction of the absorbent article. It is, for example, possible that

the fastener portion 10 is formed by a separate fastening tape tab which can be attached to the side panel 6 as is schematically shown in Fig. 1 for the case of a side panel formed integrally by the back sheet 3 and/or top sheet 2. Separate fastening tape strips 10 can be used, however, also in case of non-integral separate side panels. It is also possible, however, that the fastening means 15 is incorporated into the side panel 6 so that the fastener portion 10 is formed by the side panel 6.

**[0038]** The fastener portion 10 may comprise a backing or carrier film 20 which may bear, be bonded to or integrally include, respectively, functional components such as, for example, elastic means 17, fastening means 15, fingerlifts, release tapes to provide a Y-bond between the diaper and the fastener portion, or cover means. The backing and the functional components attached to or incorporated into it, respectively, are selected to impart advantageous properties such as, for example, elasticity, breathability, differential stiffness in machine or cross-direction, respectively, or mechanical or adhesive bonding properties to the fastener portion 10.

**[0039]** The backing may be selected from a variety of films or sheetings including single- or multilayered films, coextruded films, laterally laminated films or films comprising foam layers. The layers of such films or sheetings may comprise various materials such as, for example, polypropylene, polyvinylchloride, polyethylene terephthalate, polyethylene, polyolefin copolymers or blends of polyolefins such as, for example, a blend of polypropylene, LPDE (low density polyethylene) and/or LLDPE (linear low density polyethylene), non-woven and foamed materials. The thickness of the backing is preferably between 30 and 500  $\mu\text{m}$  and more preferably between 40 and 150  $\mu\text{m}$ . The base weight of the backing is preferably between 20 and 500  $\text{g/m}^2$ , more preferably between 40 and 300  $\text{g/m}^2$  and especially preferably between 40 -200  $\text{g/m}^2$ .

**[0040]** The backing 20 preferably comprises at least one elastic means 17 which may, for example, be bonded to the backing 20 as is shown in the specific embodiment of the fastener portion of Fig. 3. Bonding between the elastic means 17 and the backing 20 may be effected by adhesive bonds, sonic bonds, thermal bonds or any other attachment means. The elastic means 17 can also, for example, be included into the backing 20 so that its cross-section essentially matches that of the adjacent part of the backing, i. e. so that there is - different from what is shown in Fig. 3 - no step in the bonding area between elastic means 17 and backing 20. Including of one or more elastic means 17 into the fastener portion 10 which renders the fastener portion 10 stretchable in cross-direction (CD) is preferred because it increases the fit and comfort of the absorbent article 1 on the wearer.

**[0041]** The elastic means 17 may be made from a group of materials comprising essentially isotropic or essentially anisotropic materials, respectively. Useful elas-

tic materials preferably exhibit an elongation at break as measured according to ASTM D 882 in the preferred direction of stretchability of at least 50 % or more and, more preferably, of more than 100 %.

**[0042]** Preferred essentially isotropically elastic materials include elastomeric polyurethane materials, or natural or synthetic rubber materials such as, for example, ethylene-propylene-dien copolymers (EPDM), styrene-butadiene-styrene block copolymers (SBS) or styrene-(ethylene-butylene)-styrene block copolymers (SEBS). Other elastomeric materials which may be used to form the elastic means 17 include elastomeric polyamide materials and elastomeric polyester materials. Preferred elastic materials are commercially available from Exxon Mobil Corp. under the trademark Vector and from Kraton Polymers Comp. under the trademark Kraton.

**[0043]** Attaching an essentially isotropic elastic material to the backing 20 may render the fastener portion 10 unstable or wobbly in the machine direction. Therefore essentially anisotropic elastic materials which allow to provide elasticity to the fastener portion 10 in its cross-direction only, are preferred. Anisotropically elastic materials are described, for example, in US 5,885,908, WO 99/51,666, US 5,344,691, US 5,501,679 and US 5,354,597.

**[0044]** Anisotropically elastomeric materials which are useful in the present invention preferably exhibit a ratio of the F10 force required to stretch a sheet of the elastomeric material (dimensions 20 x 25 mm) by 10 percent into the machine direction over the F10 forces required in the cross direction, of at least 1.5, more preferably of at least 2.0 and especially preferably of at least 2.5.

**[0045]** The fastener portion 10 comprises a fastening means 15 which may be provided by interlocking, mechanical-type fasteners, by adhesive fastening means and/or by other fastening means. To provide a releasable and refastenable closure system, the absorbent article 1 may comprise in addition to the fastening means 15 a supplemental landing zone 5.

**[0046]** In case the fastening means 15 is of the mechanical type, a landing zone 5 may be required comprising fastening means which are mechanically engageable with fastening means 15 of the fastener portion 10. A suitable mechanical closure system comprises two interlocking means, one of them being a hook (or male) fastener means and the other being a loop (or female) fastener means. The fastening means 15 may comprise the hook fastener or the loop fastener means, respectively, but preferably comprises the hook fastener means. The hook fastener means may have any shape such as hooks, "Ts", "mushrooms" or any other shape as are well known in the art. The hook fastener material may be manufactured from a wide range of materials including nylon, polyester, polyolefins or any combination of these. Preferred hook materials are commercially available from 3M Company, St. Paul, U. S. A.

**[0047]** The fastening means 15 may be attached to the backing 20 by adhesive bonds, sonic bonds, thermal bonds or any other attachment means.

**[0048]** The loop material may be comprised of woven or non-woven fabric or any other suitable material which interlocks with the contemplary hook fastener material. Suitable loop fastening materials of a knitted or extrusion-bonded type, respectively, are commercially available, for example, from 3M Company, St. Paul, U. S. A.

**[0049]** In case the fastening means 15 comprises the hook fastener means, it may be necessary and/or desirable to apply a patch of contemplary loop material as a landing zone 5 in the waistband portion of the absorbent article as is schematically shown, for example, in Fig. 1. In other cases such as, for example, where the outer surface 3b of the back sheet 3 is formed by a non-woven material, the mechanical fastening means 15 may be selected to interact directly with the outer surface 3b of the back sheet 3 so that a separate landing zone is not required. In case of adhesive fastening means 15 it may be necessary or desirable to include a separate landing zone 5 for receiving an adhesive attachment of the fastening means thereon.

**[0050]** Useful adhesives for use in adhesive layers 16, 16a and/or as an adhesive fastening means 15, include pressure-sensitive adhesives including pressure-sensitive adhesive hot-melt adhesives and non-pressure-sensitive adhesives. Suitable pressure-sensitive adhesives include rubber-based adhesives (also called rubber-resin adhesives) which comprise natural or synthetic rubber materials and typically also tackifying resins in order to render the rubber materials tacky. Preferred examples of rubber-based pressure-sensitive adhesives are the polystyrene polyisoprene block copolymers tackified with synthetic polyterpene resins. Suitable pressure-sensitive adhesives furthermore include acrylate-based pressure-sensitive adhesives such as, for example, those disclosed in US Re 24,906 or US 4,710,536. The thickness of the adhesive layers 16, 16a preferably is between 10 and 200  $\mu\text{m}$  and more preferably between 20 and 100  $\mu\text{m}$ .

**[0051]** The shape of the fastener portion 10 can vary broadly. Fastener strips which are applied to side panels of the diaper, may have an essentially rectangular shape which can be varied by applying shaped cuttings. This is exemplified, for example, in Fig. 4 where ellipsoid cuttings are applied to a continuous web of twin fastener portion 10a. Shaped cuttings can also be applied to single fastener portions 10, and the shape of the cutting may vary and includes regular and irregular shapes.

**[0052]** The fastener portion 10 may comprise other components such as, for example, fingerlifts, cover means to partially cover an adhesive means or so-called release tapes which are provided to reliably secure the fastener portion 10 in a Y-type bonding to the diaper.

**[0053]** Fig. 2 schematically discloses a particular method of manufacturing a specific example of a fastener portion 10. A schematic cross-sectional view of

such fastener portion is shown in Fig.3. In the specific embodiment of Fig. 2, a backing 20 comprising an elastic means 17 is unwound from support roll 100. A mechanical fastening means 15 is unwound from supply roll 101 and attached to the backing, for example, by an adhesive layer. An adhesive layer 16 is applied to the manufacturer's end 11 of the backing by the coating head of adhesive applicator 102 (details not shown in Fig.2). Alternatively, it is also possible to use a backing which is pre-coated in strip form with an adhesive layer 16. It may also be possible to omit the adhesive layer 16 if the manufacturer's end 11, for example, is secured between the top sheet 2 and the back sheet 3 of the absorbent article and if such top sheet 2 and/or back sheet 3 comprise adhesive layer(s) for bonding them to each other.

**[0054]** The fastener portion 10 thus obtained is then applied to the top sheet web 2 by means of the cut and place applicator 103,104 comprising a vacuum roll 103 and a rotating knife 104.

**[0055]** The above description of the absorbent article 1 is meant to be explanatory only and not limiting. The absorbent article 1 is described here only to an extent required to explain the present invention but it is understood that the absorbent article 1 usually comprises a variety of further components and features including, for example, but not restricted to a crotch region 8 often comprising leg elastic members arranged to draw and hold the diaper against the legs of the wearer, elastic means in the front and/or rear waistband area 7a, 7b and/or the fastener portion 10, to ensure a tight fit of the absorbent article around the wearer's waist, elasticized containment flaps arranged, for example, laterally inboard from the leg elastics along the machine direction to support containment of exudates and so on.

**[0056]** Likewise, the above description of the fastener portion 10 is meant to be explanatory only and not limiting.

**[0057]** Further details on diapers and their construction are described in literature and may be taken, for example, from US 5,399,219, WO 96/10,382 or EP 0,529,681. Examples for the construction of fastener portion 10 are given, for example, in WO 99/03,437, EP 0,321,232 or US 5,399,219.

**[0058]** While the design and construction of the fastener portion 10 used in the present invention may be conventional the present invention provides a novel method for applying a fastener portion 10 to an absorbent article 1.

**[0059]** In a first alternative A of the method according to the present invention the fastener portion 10 is positioned in a first step on the inner surface 2a of the top sheet 2 so that the user's end 12 is essentially supported by the top sheet 2 and the manufacturer's end 11 is essentially adjacent to one of the edges 2c, 2d of the top sheet whereby the fastener means 15 is facing towards the inner surface 2a of the top sheet 2. The term "adjacent" includes that the manufacturer's end 11 may es-

entially project over one of the edges 2c, 2d of the top sheet as is, for example, shown schematically in Fig. 2 for a specific construction of the absorbent article 1. In Fig. 2, the top sheet 2 is provided as a continuous web with its inner surface 2a facing upwards. The web passes cut and place applicator 103,104 where a pair of two fastener portions 10 is placed adjacent to the opposite lateral edges 2c, 2d of the top sheet 2 so that the manufacturer's ends 11 of the fastener portions 10 project over the corresponding edges 2c, 2d; correspondingly the user's ends 12 of the fastener portions 10 are supported by the top sheet so that the outboard edges of the user's ends 12 in cross-direction essentially match with the corresponding edges 2c, 2d of the top sheet 2. The pair of fastener portions 10 is supplied discontinuously by means of cut and place applicator 103,104 so that the fastener portions 10 are placed on areas of the continuous web of top sheet 2 forming the waistband portion or portions of the resulting absorbent article 1. If desired, the user's end of fastener portion 10 may be temporarily held in place on the top sheet web 2, for example, by mechanical means such as plates, bars or belts until its manufacturer's end 11 is secured to the absorbent article as described below.

**[0060]** In a second step of the method according to the present invention, the manufacturer's end 11 of the fastener portion is secured to the absorbent article. In the specific embodiment of the method schematically shown in Fig. 2, the manufacturer's end is folded by essentially 180° around the edge 2c, 2d of the top sheet 2 so that it is subjacent to the outer surface 2b of the top sheet and essentially opposite to the user's end 12. The manufacturer's end 11 is secured between top sheet 2 and back sheet 3 which is supplied as a continuous web with its inner surface 3a facing towards the outer surface 2b of the top sheet 2. The top sheet 2 and the back sheet 3 are laminated together between the pair of rollers 107 (only one roller shown) to give a continuous web of absorbent article 1.

**[0061]** An enlarged cross section through the circled area of the waistband portion of the absorbent article 1 is shown in Fig. 3. The absorbent article 1 comprises a top sheet 2 and a back sheet 3 sandwiching an absorbent core 4 (not shown in Fig. 2). The manufacturer's end 11 of the fastener portion 10 is arranged between the top sheet 2 and the back sheet 3. The manufacturer's end 11 of the fastener portion 10 is secured to the outer surface 2b of the top sheet 2 through adhesive layer 16 and the back sheet 3 is bonded to the manufacturer's end 11 of the fastener portion 10, to the top sheet 2 and to the absorbent core 4 by means of adhesive layer 16a. The user's end 12 of the fastener portion 10 can be conceptionally divided into a grip portion 12' and an intermediate portion 12" located between the grip portion 12' and the manufacturer's end 11. The grip portion 12' includes in the specific embodiment of Fig. 2 and 3 elastic means 17, fastening means 15 and a fingerlift portion at the inboard end of the grip portion 12'.

**[0062]** The specific embodiment of alternative A of the method of the present invention schematically represented in Fig. 2 and 3 is to merely illustrate the invention without restricting it in any way. It is, for example, not required that the manufacturer's end 11 essentially projects over the edge 2c, 2d of the top sheet 2 but the manufacturer's end 11 can be partly or fully supported by the top sheet 2. In this case, when folding over the manufacturer's end 11, the underlying part of the top sheet 2 would be folded over, as well. It is, for example, also not required that the manufacturer's end when folded over, is arranged between the top sheet 2 and the back sheet 3 but it is also possible that the top sheet 2 and the back sheet 3 are laminated first, followed by folding over of the manufacturer's end and adhering it to the outer surface 3b of the top sheet. Securing of the manufacturer's end 11 of the fastener portion 10 to the absorbent article 1 and bonding of the top sheet 2 and the back sheet 3 can be affected through attachment means other than adhesive bonds. The fastener portions 10 may be secured to other portions of the diaper as well. It is also possible, for example, to apply one fastener portion 10 only to each of the front and rear waistband portions 7b, 7a or to apply a pair of fastener portions 10 to each of the front and rear waistband portions 7b, 7a.

**[0063]** While Fig. 2 and 3 are understood to be explanatory but not limiting, they illustrate the gist of the present invention which resides in providing a method for assembling a fastener portion 10 to an absorbent article 1 comprising

- placing the fastener portion 10 onto the top sheet 2 or the back sheet 3, respectively, of the absorbent article 1 so that the user's end 12 of the fastener portion 10 is supported by the top sheet 2 or the back sheet 3 and preferably is arranged already in the position it assumes when the absorbent article is being stored, before
- manipulating in a subsequent step the manufacturer's end 11 so that it can be secured to the diaper.

**[0064]** In the state of the art, the manufacturer's end has been assembled to the diaper first followed by manipulating the user's end to bring it into its final storage position.

**[0065]** The method of the present invention is specifically suited to be applied under high speed manufacturing conditions. Since the user's end is supported by the top sheet 2 or the back sheet 3, respectively, during the assembling of the fastener portion 20 to the absorbent article, the method of the present invention is especially advantageous for applying fastener portions 10 comprising elastic means.

**[0066]** In a second alternative B of the method according to the present invention, the fastener portion 10 is positioned in a first step on the outer surface 3b of the back sheet 3 so that the user's end 12 is essentially sup-

ported by the top sheet 2 and the manufacturer's end 11 is essentially adjacent to one of the edges 3c, 3d of the back sheet 3 whereby the fastener means 15 is facing outwards. Subsequently, in a second step, the manufacturer's end 11 of the fastener portion 10 is folded over as has been described above.

**[0067]** In an especially advantageous embodiment of the present invention, a twin fastener portion 10a is used comprising a first and a second manufacturer's end 11a, 11b which are connected by user's ends 12a, 12b and a releasable connection 19, wherein the dimensions of the manufacturer's ends 11a, 11b, the user's ends 12a, 12b and the releasable connection 19 in cross-direction being selected so that the manufacturer's ends 11a, 11b can be positioned adjacent to opposite edges 2c, 2d and/or 3c, 3d of the top sheet 2 or the back sheet 3, respectively. In the twin fastener portion 10a, the user's ends 12a and 12b are connected through a releasable connection 19 which can be removed to provide two separate fastener portions 10.

**[0068]** Twin fastener portions 10a wherein the releasable connection 19 is formed by an additional separate part, are disclosed in WO 84/04,242. In one of the two embodiments of WO 84/04,242, the releasable connection is a perforated adhesive strip which is adhered to the user's ends 12a, 12b directly or by a separate Z-folded fixing strip. The perforated adhesive strip can be broken to provide two separate fastener portions 10. In the second embodiment of WO 84/04,242, the releasable connection is a removable tape which is adhered to the user's ends 12a, 12b directly or by a separate Z-folded fixing strip. The removable tape is peeled off to provide two separate fastener portions 10.

**[0069]** While the twin fastener portions disclosed in WO 84/04,242 can be used in the method of the present invention, it was found by the present inventors that twin fastener portions 10a wherein the two user's ends 12a, 12b are directly releasably connected to each other without an additional separate part which has to be removed and discarded, are especially preferred. These constructions are easy to handle under high speed manufacturing conditions and do not result in additional waste when breaking the releasable connection 19. Twin fastener portions wherein the two user's ends 12a, 12b are directly connected to each other through a releasable connection 19 with the proviso that such releasable connection 19 does not comprise a separate part, are new and they are subject matter of the present invention.

**[0070]** The releasable connection 19 preferably is a weak line such as, for example, a perforation arranged directly between the two user's ends 12a, 12b. The weak line connects the user's ends 12a and 12b in the twin fastener portions 10a but can easily be removed such as, for example, broken to release a pair of separate fastener portions 10 without creating any additional waste. In another embodiment, the two user's ends 12a, 12b may also, for example, overlap over a small dis-

tance whereby the two user's ends 12a, 12b are releasably connected to each other in such overlapping area, for example, by means of ultrasonic bonding spots or a little spot of wax or removable adhesive which do not need to be removed and discarded upon breaking of such temporary bond but can be left in place.

**[0071]** A specific embodiment of the novel twin fastener portions 10a according to the present invention where the releasable connection 19 does not comprise a separate part, is schematically shown in form of a continuous web in the left part of Fig. 4. In this schematic embodiment, the twin fastener portion 10a is coated with an adhesive layer 16 on each of the manufacturer's ends 11a, 11b and comprises an elastic means 17 and a fastening means 15 on each of the user's ends 12a, 12b. The releasable connection 19 is formed by perforated line 19. The shape of two neighbouring twin fastener portions is modified by applying shaped cuttings 18.

**[0072]** The graphic representation of Fig. 4 is intended to illustrate the present invention without limiting it. The releasable connection 19, for example, can also be formed by a wavy perforated line resulting in separate fastener portions 10 having curved fingerlifts.

**[0073]** The various components of the twin fastener portion 10a such as the fastening means 15, the elastic means 17, the backing, the adhesive layer 16 and so on may be formed, for example, by the materials disclosed for single fastener portions 10 above but other materials may be used, as well.

**[0074]** The preferred method of the present invention employing twin fastener portions 10a is illustrated by the non-limiting schematic representation of Fig. 4 where twin fastener portions 10a are unwound from the roll 120 and applied to the inner surface 2a of the top sheet 2 which is provided as a continuous web. The twin fastener portions 10a are applied to the inner surface 2a of the top sheet via a place and cut applicator 103, 104 in a discontinuous way so that the twin fastener portions 10a are placed on areas of the continuous web of top sheet 2 forming one of the waistband portions 7a, 7b or both waistband portions 7a, 7b of the resulting absorbing article 1, respectively. The twin fastener portions 10a are placed on the top sheet 2 so that their user's ends 12a, 12b are supported by the top sheet 2 and the two opposed manufacturer's ends 11a, 11b are adjacent to the opposed edges 2c, 2d of the top sheet. The subsequent step of folding over the manufacturer's ends is schematically shown for two different constructions in Fig. 5a and 5b.

**[0075]** In Fig. 5a, the manufacturer's ends 11a, 11b of the twin fastener portion 10a are essentially fully supported by the top sheet 2 so that the outboard ends of the manufacturer's ends 11a, 11b essentially match with the edges 2c, 2d of the top sheet 2 while the lateral extension of the back sheet 3 is smaller than that of the top sheet 2 by about the sum of the extensions of the manufacturer's ends 11a, 11b in total. The manufacturer's ends 11a, 11b are then folded over together with the

underlying portions of the top sheet 2 so that the configuration shown in enlarged form in the circle is obtained.

**[0076]** In Fig. 5b the manufacturer's ends 11a, 11b essentially project over the edges 2c, 2d of the top sheet 2 so that only the manufacturer's ends 11a, 11b are folded over. In the configuration shown in enlarged form in the circle, the manufacturer's end 11 is positioned between the top sheet 2 and the back sheet 3. It would also be possible, however, that the top sheet 2 and the back sheet 3 are laminated first, and that the manufacturer's end 11 is then folded over to adhere to the outer surface 3b of the top sheet.

**[0077]** The use of twin fastener portion 10a is advantageous because, for example, in the method of manufacturing of Fig. 4 only one fastener portion 10a needs to be applied as opposed to two fastener portions in the corresponding method of Fig. 2. Also the releasable connection is usually removed only by the end user so that the user's ends are reliably prevented from "popping open" during the manufacturing and storage of the diaper.

**[0078]** It is, however, also possible that the twin fastener portion 10a is broken into two separate fastener portions 10 during the manufacturing of the diaper as is shown schematically for a specific construction in Fig. 6. In Fig. 6, the twin fastener portion 10a has been applied to a top sheet 2 comprising a fold 2e. In this specific embodiment, the manufacturer's ends 11a, 11b have been folded around prior to the application of the twin fastener 10a so that the manufacturer's ends are adhered to the inner surface 2a of the top sheet 2. It is, however, also possible that the manufacturer's ends are folded around so that they are located opposite to the user's ends 12a, 12b and subjacent to the outer surface 2b of the top sheet.

**[0079]** In the upper part of Fig. 6, the releasable connection 19 of the twin fastener portion 10a has not been broken yet; the twin fastener portion 10a has been applied to the top sheet and the manufacturer's ends 11a have been folded over. In the next step which is shown in the lower part of Fig. 6, the releasable connection 19 is broken by exerting lateral forces in cross-direction on to the top sheet 2 to straighten out fold 2e. Subsequently to this, the back sheet 3 is laminated to the top sheet as is schematically indicated in Fig. 6.

#### Reference numbers

**[0080]**

1	absorbent article
2	top sheet
2a	inner surface of top sheet
2b	outer surface of top sheet
2c, 2d	lateral edges of top sheet
2e	fold in top sheet
3	back sheet

3a	inner surface of back sheet		
3b	outer surface of back sheet		
3c,3d	lateral edges of back sheet		
4	absorbent core of the diaper		
5	landing zone of the diaper	5	
6	side panel of the diaper		
7a	rear waistband portion		
7b	front waistband portion		
8	crotch region		
10	fastener portion	10	
10a	twin fastener portion		
11	manufacturer's end of fastener portion		
11 a, b	manufacturer's ends of twin fastener portion		
	10a		
12	user's end of fastener portion comprising	15	
	grip portion 12' and intermediate portion 12"		
12a, b	user's ends of twin fastener portions 10a		
15	fastener means of fastener portion 10		
16,16a	adhesive layers		
17	elastic means	20	
18	shaped cutting		
19	releasable connection		
20	backing		
100,101	supply roll		
102	adhesive applicator	25	
103,104	place and cut applicator comprising vacuum		
	roll 103 and rotating knife 104		
105	roller		
106	folding device		
107	roller	30	

## Claims

1. Method of applying a fastener portion 10 to an absorbent article 1 and, in particular, to a disposable diaper, said absorbent article 1 comprising a top sheet web 2 having an inner surface 2a, an outer surface 2b, a first lateral edge 2c and a second lateral edge 2d, a back sheet 3 having an inner surface 3a, an outer surface 3b, a first lateral edge 3c and a second lateral edge 3d, an absorbent core 4 arranged between said top sheet 2 and said back sheet 3, said fastener portion 10 comprising a manufacturer's end 11 for securing said fastener portion 10 to the absorbent article 1 and a user's end 12 comprising a fastener means 15, said method comprising in a first alternative (A) the steps of
  - (i) providing a top sheet 2,
  - (ii) placing one or more fastener portions 10 onto the inner surface 2a of the top sheet 2 so that the user's end 11 is essentially supported by the top sheet 2 and the manufacturer's end 12 is essentially adjacent to one of the edges 2c, 2d of the top sheet 2 whereby the fastening means 15 is facing towards the inner surface 2a of the top sheet 2,
  - (iii) folding around the manufacturer's end 11 so that it is essentially opposite to the user's end 12, and
  - (iv) applying an absorbent core 4 and a back sheet 3 onto the top sheet 2, whereby the sequence of steps (iii) and (iv) may be exchanged, or in a second alternative (B)
    - (i) providing a back sheet 3,
    - (ii) placing one or more fastener portions 10 onto the outer surface 3b of the back sheet 3 so that the user's end 12 is essentially supported by the back sheet 3 and the manufacturer's end 11 is essentially adjacent to one of the edges 3c, 3d of the back sheet 3 whereby the fastening means 15 is facing away from the outer surface 3b of the back sheet 3,
    - (iii) folding over the manufacturer's end 11 so that it is essentially opposite to the user's end 12, and
    - (iv) applying an absorbent core 4 and a top sheet 2 onto the back sheet 3,
 whereby the sequence of steps (iii) and (iv) may be exchanged.
2. Method according to claim 1 wherein the one or more fastener portions 10 are applied to the rear waistband portion 7a and/or the front waistband portion 7b.
3. Method according to any of claims 1 - 2 wherein the one or more fastener portions 10 are applied intermittently to a continuously running web of a top sheet 2 or back sheet 3, respectively, to provide a continuously running web of an absorbent article 1 from which separate absorbent articles can be cut.
4. Method of applying one or more twin fastener portions 10a to an absorbent article 1 and, in particular, to a disposable diaper, said absorbent article 1 comprising a top sheet web 2 having an inner surface 2a, an outer surface 2b, a first lateral edge 2c and a second lateral edge 2d, a back sheet 3 having an inner surface 3a, an outer surface 3b, a first lateral edge 3c and a second lateral edge 3d, an absorbent core 4 arranged between said top sheet 2 and said back sheet 3, said twin fastener portion 10a comprising a first manufacturer's end 11a, a first user's end 12a, a releasable connection 19, a second user's end 12b and a second manufacturer's end 11b, wherein the dimensions of the manufacturer's ends 11a, 11b, the user's ends 12a, 12b and the releasable connection 19 in cross-direction being selected so that the manufacturer's ends 11a, 11b can be positioned adjacent to opposite lateral edges 2c, 2d and/or 3c, 3d of the top sheet 2 or the back sheet 3, respectively, and wherein the releasable connection 19 is positioned adjacent to opposite lateral edges 2c, 2d and/or 3c, 3d of the top sheet 2 or the back sheet 3, respectively.

tion 19 can be released to provide two separate fastener portions 10, said method comprising in a first alternative (A) the steps of

- (i) providing a top sheet 2,
- (ii) placing the one or more twin fastener portions 10a onto the inner surface 2a of the top sheet 2 so that the user's ends 12a, 12b and the releasable connection 19 are essentially supported by the top sheet 2 and the manufacturer's ends 11a, 11b are essentially adjacent to opposite edges 2c, 2d of the top sheet 2 whereby the fastening means 15a, 15b are facing towards the inner surface 2a of the top sheet 2,
- (iii) folding around the manufacturer's ends 11a, 11b, and
- (iv) applying an absorbent core 4 and a back sheet 3 onto the top sheet 2,

whereby the sequence of steps (ii) and (iii) or (iii) and (iv), respectively, may be exchanged, or in a second alternative (B)

- (i) providing a back sheet 3,
- (ii) placing the one or more twin fastener portions 10a onto the outer surface 3a of the back sheet 3 so that the user's ends 12a, 12b and the releasable connection 19 are essentially supported by the back sheet 3 and the manufacturer's ends 11a, 11b are essentially adjacent to opposite lateral edges 3c, 3d of the back sheet 3 whereby the fastening means 15 are facing outwards,
- (iii) folding around the manufacturer's ends 11a, 11b, and
- (iv) applying an absorbent core 4 and a top sheet 2 onto the back sheet 3,

whereby the sequence of steps (ii) and (iii) or (iii) and (iv), respectively, may be exchanged.


5. Method according to claim 4 wherein the one or more twin fastener portions 10a are applied to the rear waistband portion 7a and/or to the front waistband portion 7b.
6. Method according to any of claims 4 - 5 wherein the one or more twin fastener portions 10a are applied intermittently to a continuously running web of a top sheet 2 or back sheet 3, respectively, to provide a continuously running web of an absorbent article 1 from which separate absorbent articles 1 can be cut.
7. Method according to any of claims 4-6, wherein the top sheet 2 in the first alternative (A), step (ii) comprises a fold 2e or wherein the back sheet 3 in the

second alternative (B), step (ii) comprises a fold, respectively, whereby such folds are straightened out in subsequent steps during or after the application, respectively, of the twin fastener portion 10a, by exerting a force in cross direction on at least the top sheet 2 or the back sheet 3, respectively, thereby breaking the twin fastener portion 10a into two separate fastener portions 10.


8. Twin fastener portion 10a comprising in the sequence given in cross-direction a first manufacturer's end 11a, a first user's end 12a, a releasable connection 19, a second user's end 12b and a second manufacturer's end 11b, wherein the user's ends 12a and 12b are directly connected to each other by the releasable connection 19 without any separate part and wherein the releasable connection 19 can be released to provide two separate fastener portions 10.


9. Twin fastener portion 10a according to claim 8 wherein the releasable connection 19 is a perforation.


10. Twin fastener portion 10a according to claim 9 wherein the perforation is straight-line or exhibits a regular pattern.

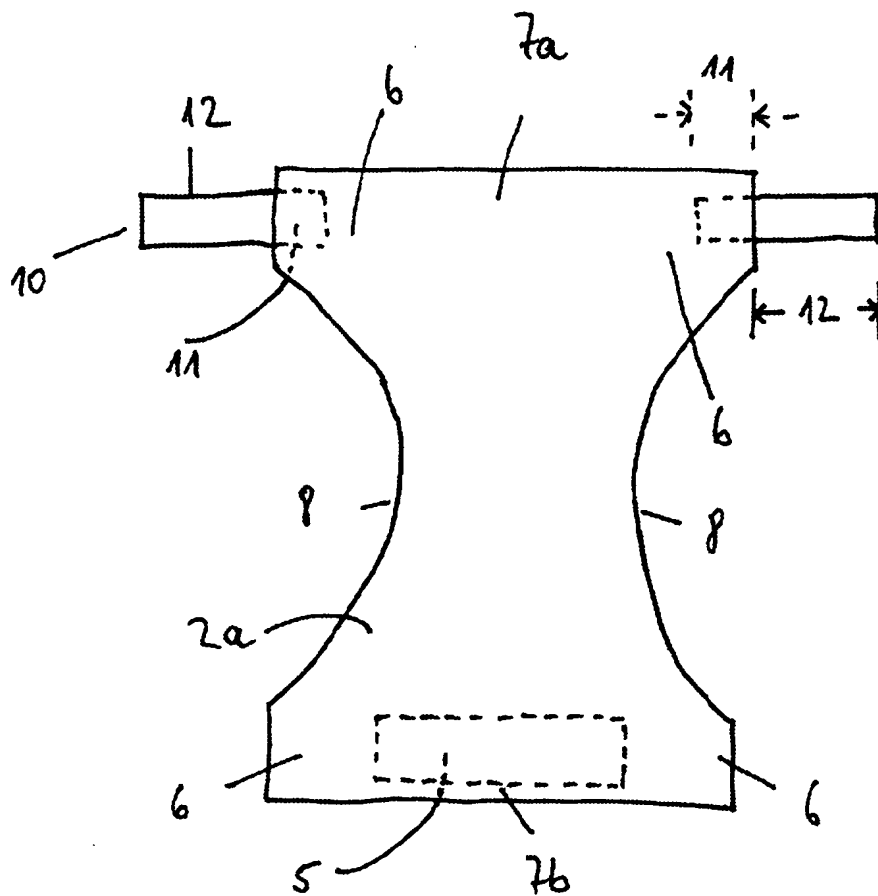


**Fig. 1a**

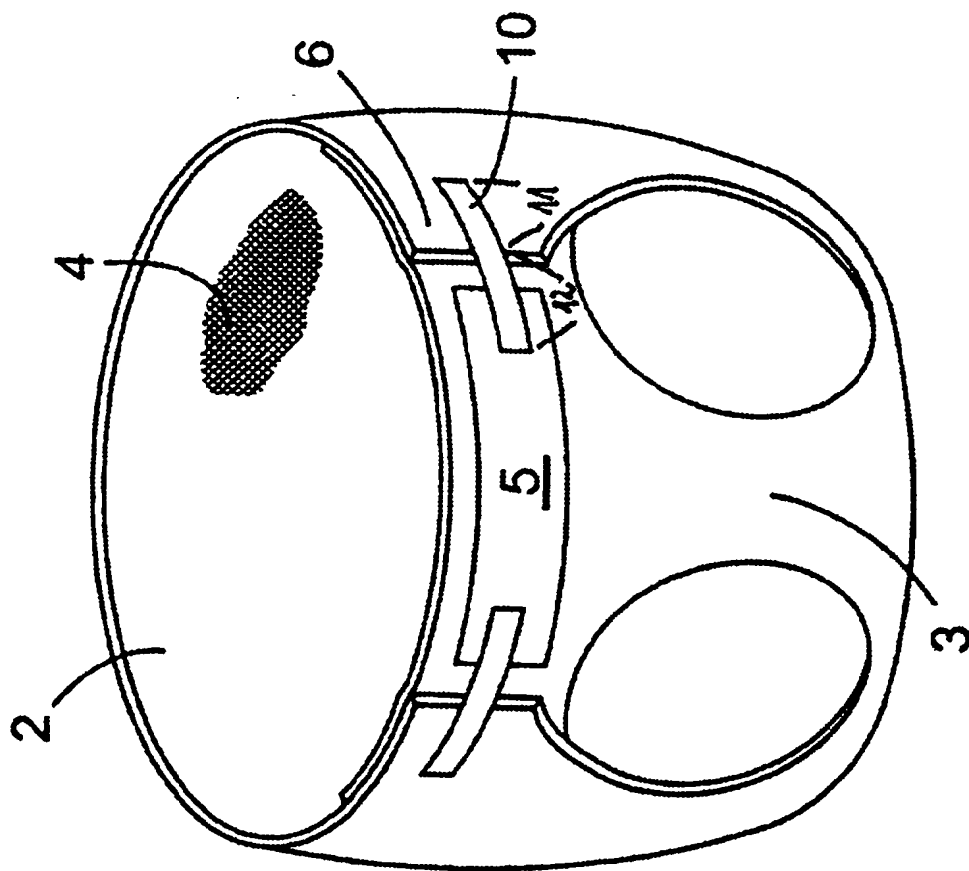

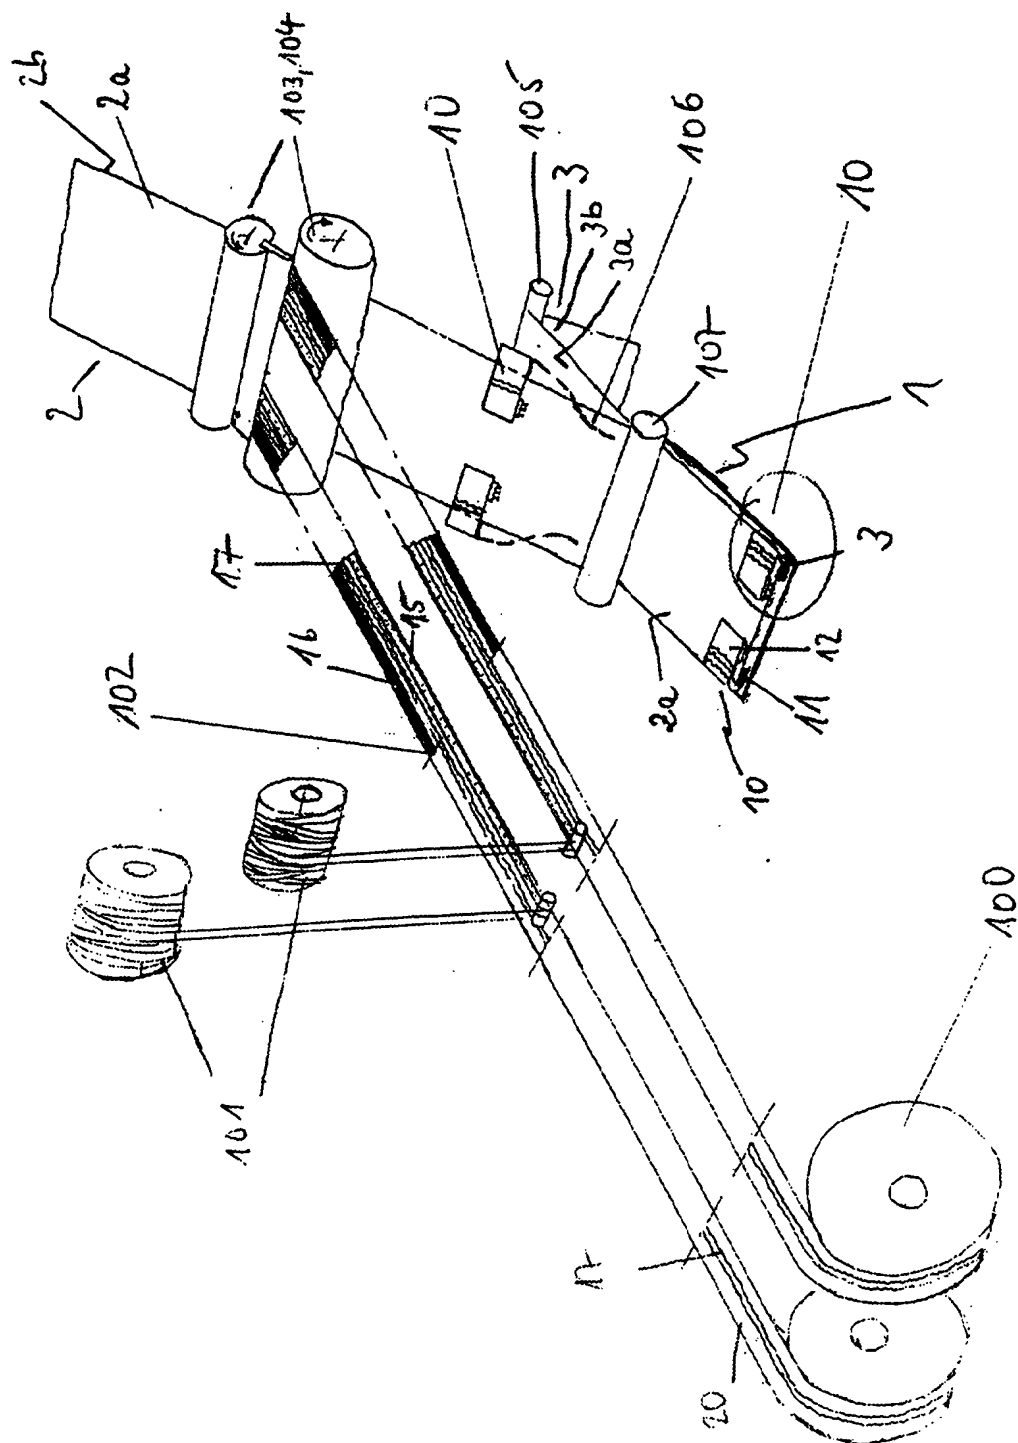

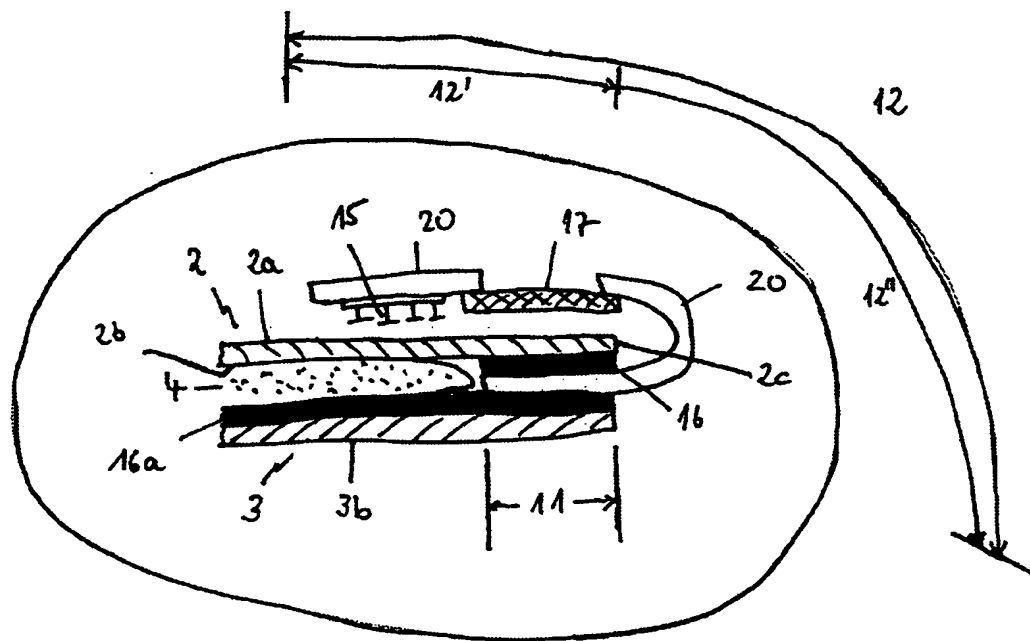

**Fig. 3**

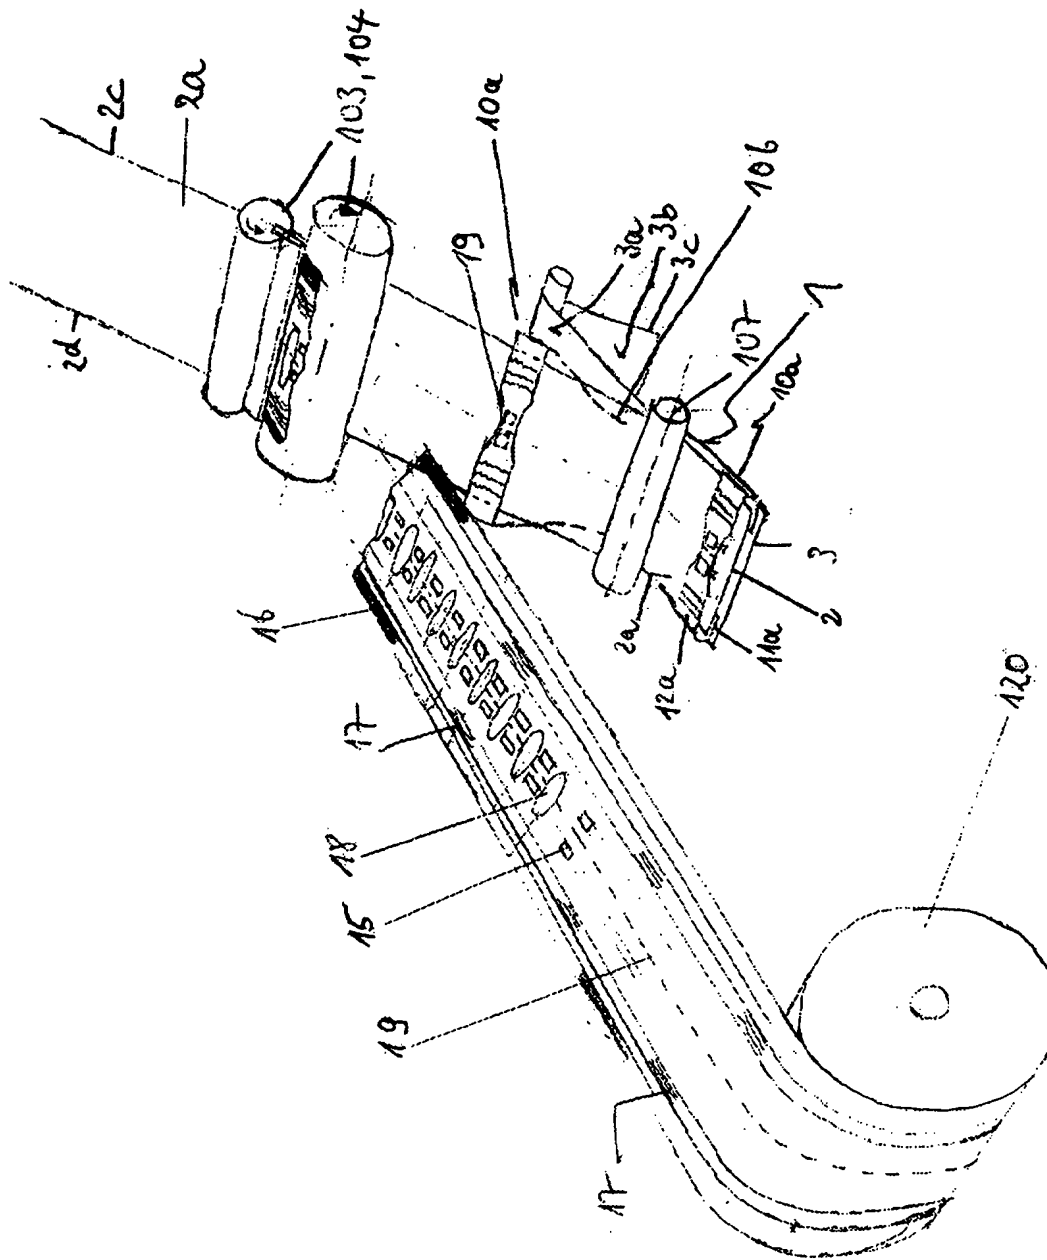

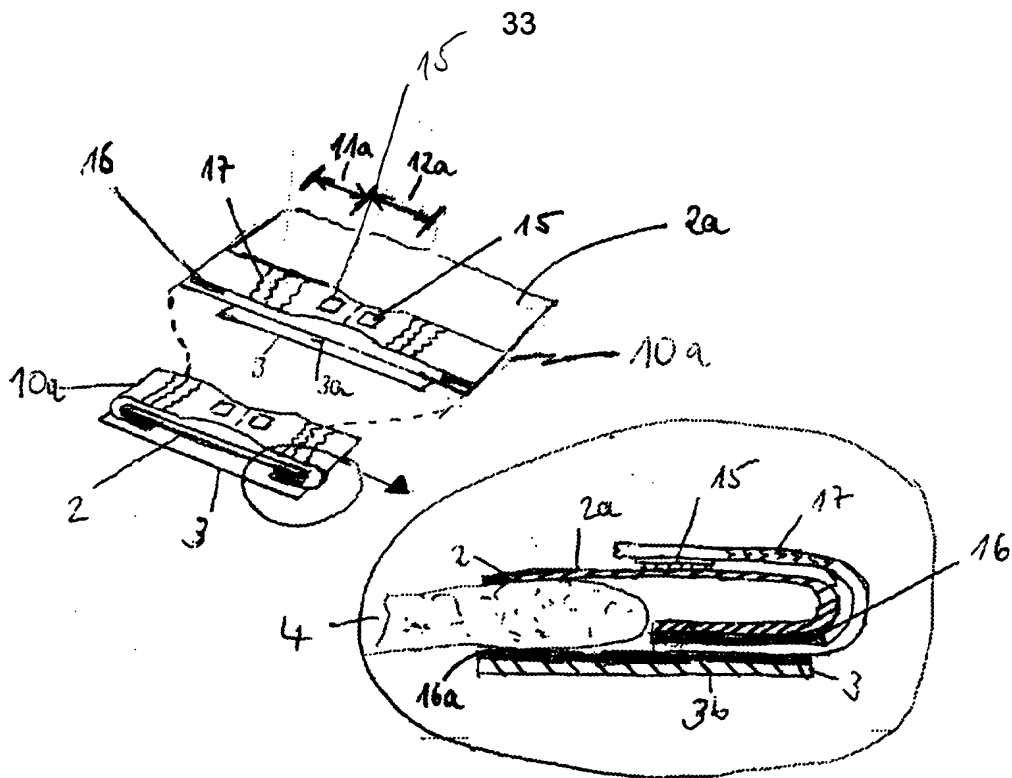


Fig. 5a


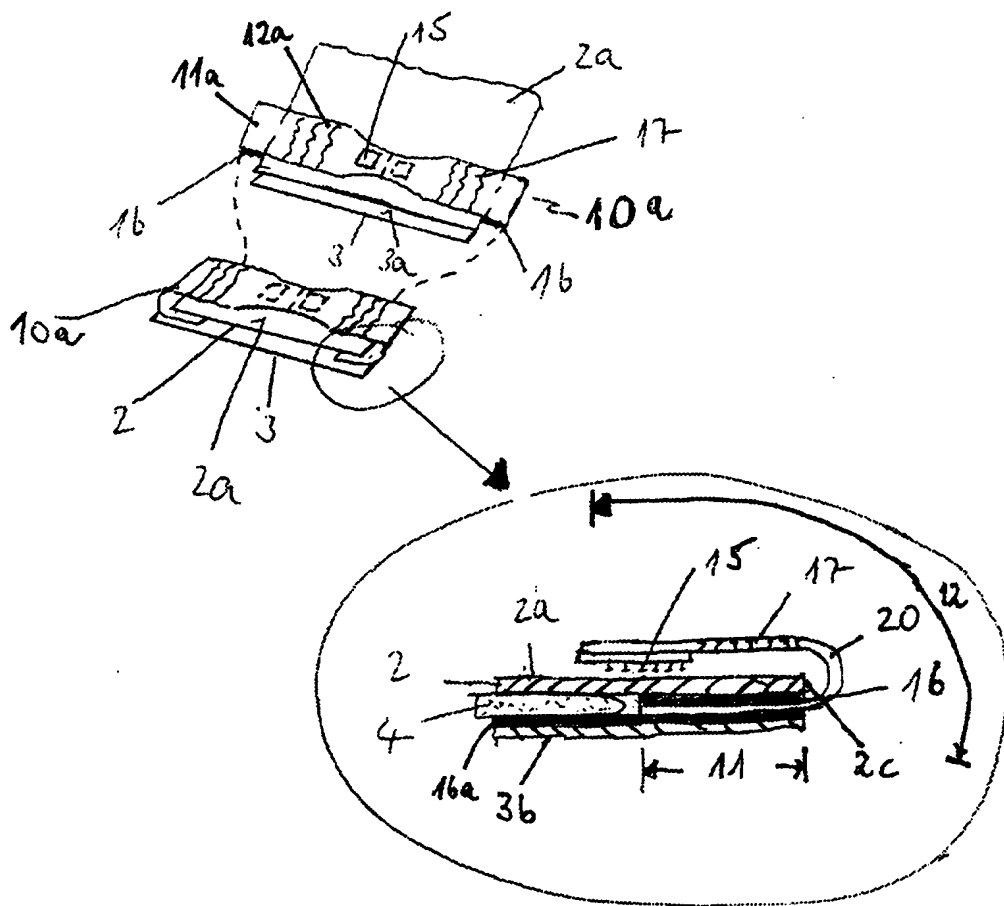


Fig. 5b



**Fig. 6**

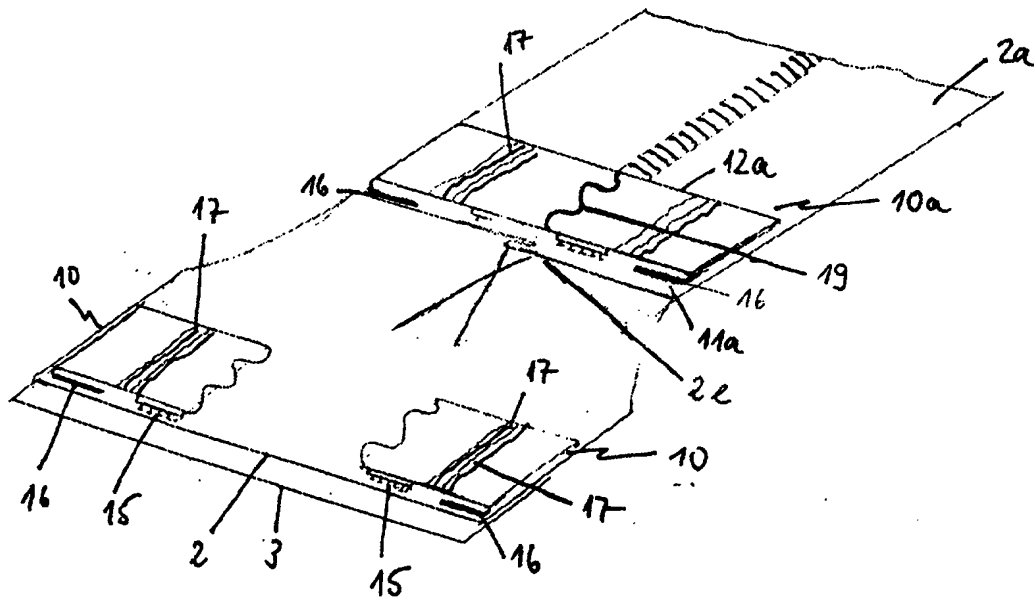

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 12 3651

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 6 264 784 B1 (MENARD MICHAEL JOSEPH ET AL) 24 July 2001 (2001-07-24) * column 9, line 24 - column 10, line 62; claims; figures *	1,3,4,6	A61F13/15
Y	DE 93 21 615 U (KIMBERLY CLARK CO) 21 December 2000 (2000-12-21) * page 12, paragraph 1 * * page 14, last paragraph - page 16, last paragraph; figures *	1,3,4,6	
X	DE 197 32 499 A (HARTMANN PAUL AG) 4 February 1999 (1999-02-04) * claims; figures *	8-10	
A	WO 00 37010 A (KIMBERLY CLARK CO) 29 June 2000 (2000-06-29) * claims; figures *	1	
D,X	WO 84 04242 A (JOHNSON & JOHNSON PROD INC) 8 November 1984 (1984-11-08) * page 3, line 31 - line 32 *	8,10	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
D,X	US 5 876 531 A (BURGAN STUART JAMES ET AL) 2 March 1999 (1999-03-02) * column 13, line 27 - line 47; figures *	8	A61F
A	US 5 603 794 A (THOMAS SUZANNE M) 18 February 1997 (1997-02-18) * column 5, line 42 - line 67; claims; figures *	1,2,4,5	
A	DE 198 13 334 A (HARTMANN PAUL AG) 30 September 1999 (1999-09-30) * claims; figures *	1,4,8	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>12 March 2002</b>	Examiner <b>Douskas, K</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPC FORM 1503 03/92 (P04/001)



European Patent  
Office

Application Number

EP 01 12 3651

### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☒ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 12 3651

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CI.7)
A	US 5 681 306 A (GOULAIT DAVID J K ET AL) 28 October 1997 (1997-10-28) * claims; figures *	1	
			TECHNICAL FIELDS SEARCHED (Int.CI.7)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>12 March 2002</b>	Examiner <b>Douskas, K</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 (03.82) (P04001)



European Patent  
Office

**LACK OF UNITY OF INVENTION  
SHEET B**

Application Number  
EP 01 12 3651

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-7

Method for applying a fastener portion to an absorbent article

2. Claims: 8-10

Twin fastener portion having a releaseable connection

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 3651

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-03-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6264784	B1	24-07-2001	AT 145812 T	15-12-1996
			AU 666333 B2	08-02-1996
			AU 2538892 A	01-04-1993
			BR 9203778 A	20-04-1993
			CA 2079150 A1	28-03-1993
			CN 1073354 A	23-06-1993
			CZ 282819 B6	15-10-1997
			DE 69215643 D1	16-01-1997
			DE 69215643 T2	03-07-1997
			DK 539032 T3	07-04-1997
			EP 0539032 A1	28-04-1993
			ES 2094305 T3	16-01-1997
			GR 92100400 A , B	21-06-1993
			HK 46797 A	18-04-1997
			HU 64824 A2	28-03-1994
			JP 6121811 A	06-05-1994
			KR 227951 B1	01-11-1999
			MX 9205495 A1	01-05-1993
			SK 294392 A3	08-03-1995
DE 9321615	U	21-12-2000	DE 9321615 U1	21-12-2000
			AT 152342 T	15-05-1997
			AU 667117 B2	07-03-1996
			AU 4490293 A	14-04-1994
			BR 9303669 A	05-04-1994
			CA 2082669 A1	31-03-1994
			CN 1088079 A	22-06-1994
			CZ 9301959 A3	18-05-1994
			DE 69310312 D1	05-06-1997
			DE 69310312 T2	25-09-1997
			DK 595047 T3	01-12-1997
			EP 0595047 A1	04-05-1994
			ES 2100415 T3	16-06-1997
			GR 3024256 T3	31-10-1997
			HK 1006272 A1	19-02-1999
			JP 6125938 A	10-05-1994
			KR 240236 B1	15-01-2000
			MX 9206146 A1	31-03-1994
			PL 300536 A1	05-04-1994
			RU 2124876 C1	20-01-1999
DE 19732499	A	04-02-1999	DE 19732499 A1	04-02-1999
WO 0037010	A	29-06-2000	AU 2183500 A	12-07-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 3651

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-03-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0037010	A		BR 9915792 A	21-08-2001
			EP 1139957 A1	10-10-2001
			WO 0037010 A1	29-06-2000
WO 8404242	A	08-11-1984	AU 2824584 A	19-11-1984
			DK 609084 A	18-12-1984
			EP 0143810 A1	12-06-1985
			FI 845060 A	20-12-1984
			WO 8404242 A1	08-11-1984
			ZA 8402892 A	27-11-1985
US 5876531	A	02-03-1999	AU 709445 B2	26-08-1999
			AU 1958197 A	22-09-1997
			BR 9707949 A	27-07-1999
			CN 1212615 A	31-03-1999
			CZ 9802820 A3	17-02-1999
			EP 0888105 A1	07-01-1999
			HU 9902205 A2	29-11-1999
			JP 2000506046 T	23-05-2000
			NZ 331911 A	28-10-1999
			PL 328694 A1	15-02-1999
			SK 119698 A3	11-02-1999
			WO 9732555 A1	12-09-1997
			ZA 9701169 A	25-08-1997
US 5603794	A	18-02-1997	AT 205696 T	15-10-2001
			AU 2053697 A	10-09-1997
			BR 9707665 A	13-04-1999
			CN 1211913 A	24-03-1999
			DE 69706836 D1	25-10-2001
			EP 0886510 A1	30-12-1998
			ES 2160328 T3	01-11-2001
			JP 11504252 T	20-04-1999
			WO 9730672 A1	28-08-1997
DE 19813334	A	30-09-1999	DE 19813334 A1	30-09-1999
US 5681306	A	28-10-1997	US 5487809 A	30-01-1996
			US 5578152 A	26-11-1996
			US 5482588 A	09-01-1996
			AU 1708797 A	20-08-1997
			BR 9707217 A	20-07-1999
			CA 2245012 A1	31-07-1997
			CN 1213289 A	07-04-1999
			CZ 9802297 A3	17-02-1999
			EP 0877589 A1	18-11-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 3651

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-03-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5681306      A		HU      9900392 A2	28-05-1999
		JP      11503060 T	23-03-1999
		NO      983467 A	29-09-1998
		TR      9801437 T2	21-10-1998
		WO      9726851 A1	31-07-1997
		AU      1643999 A	13-05-1999
		AU      2703495 A	15-01-1996
		BR      9507990 A	05-08-1997
		CA      2192323 A1	28-12-1995
		CN      1151112 A	04-06-1997
		CZ      9603761 A3	11-06-1997
		DE      69509899 D1	01-07-1999
		DE      69509899 T2	14-10-1999
		EP      0766547 A1	09-04-1997
		ES      2131831 T3	01-08-1999
		FI      965168 A	20-12-1996
		GR      3030792 T3	30-11-1999
		HK      1012965 A1	23-06-2000
		JP      10502103 T	24-02-1998
		NO      965485 A	21-02-1997
		NZ      288112 A	28-01-1999
		WO      9535079 A1	28-12-1995
		US      5620432 A	15-04-1997
		ZA      9505103 A	16-04-1996
		AT      196241 T	15-09-2000
		AU      5741196 A	11-12-1996
		BR      9608840 A	08-06-1999
		CA      2221936 A1	28-11-1996
		CN      1207656 A	10-02-1999
		CZ      9703674 A3	18-03-1998
		DE      69610306 D1	19-10-2000
		DE      69610306 T2	26-04-2001
		EP      0828470 A1	18-03-1998
		ES      2150126 T3	16-11-2000
		HU      9901427 A2	30-08-1999
		JP      11507847 T	13-07-1999
		KR      266485 B1	15-09-2000
		NO      975345 A	26-01-1998
		TR      9701420 T1	21-03-1998
		WO      9637174 A1	28-11-1996
<hr/>			

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82